



Fisherbrand Small Equipment

Outfit your lab with value-packed equipment.



The **Right Products** at the **Right Value** from the **Right Partner**

For over 50 years, the Fisherbrand collection has offered an expansive offering of equipment and instruments to support your scientific endeavors. With our knowledge of your work and the work of others, we manufacture or collaborate with top manufacturers to source quality equipment that can fit into every budget without sacrificing functionality.

Contents

Stirrers, Hotplates, and Stirring Hotplates	3
Shakers and Mixers	5
Homogenizers	8
Water Baths and Incubators	9
Chillers and Circulators	10
Ovens, Sterilizers, and Pumps	13
Electrophoresis Equipment	15
Centrifuges, Microplate Washers, and Readers	17
Microscopes	18
Refractometers	20
Heating Mantles	21

Stirrers, Hotplates, and Stirring Hotplates



Stirrers

Description	Surface Material	Surface Dimensions	Speed	Voltage (Plug Style)	Cat. No.
Fisherbrand™ RT Basic Magnetic Stirrer	Polypropylene	Dia: 4.7 in. (12 cm)	150 to 2,500 rpm	120 V (U.S.)	11-676-263
				120–240 V (Various)	11-676-264
		Dia: 6.7 in. (17 cm)		120 V (U.S.)	11-676-265
				120–240 V (Various)	11-676-266
		Dia: 8.7 in. (22 cm)		120 V (U.S.)	11-676-267
			120–240 V (Various)	11-676-268	
Fisherbrand™ Magnetic Stirrer	Porcelain	4 x 4 in. (10 x 10 cm)	250 to 2,500 rpm	120 V (U.S.)	11-520-16S
		7 x 7 in. (18 x 18 cm)			11-520-49S
Fisherbrand™ Isotemp™ Stirrer*	Ceramic	4.25 x 4.25 in. (10.8 x 10.8 cm)	50 to 1,500 rpm	120 V (U.S.)	S88854200
				230 V (EU)	S88854205
		7.25 x 7.25 in. (18.4 x 18.4 cm)		120 V (U.S.)	S88857200
				230 V (EU)	S88857205
		10.25 x 10.25 in. (26 x 26 cm)		120 V (U.S.)	S88850200
		230 V (EU)	S88850205		
Fisherbrand™ Isotemp™ Advanced Stirrer*	Ceramic	7.25 x 7.25 in. (18.4 x 18.4 cm)	50 to 1,500 rpm	120 V (U.S.)	S88857290
Fisherbrand™ Isotemp™ Stirrer*	Ceramic	4.25 x 4.25 in. (10.8 x 10.8 cm)	50 to 1,500 rpm	120 V (U.S.)	S88854200
Fisherbrand™ Ultra-Thin Magnetic Digital Stirrer	Polyester	Dia.: 3.7 in. (9.4 cm)	15 to 1,500 rpm	100–230 V (U.S.)	14-955-149
Fisherbrand™ Mini Stirrer, Bacteria Design	Nylon	Dia.: 3.3 in. (8.3 cm)	350 to 2,000 rpm	120 V (U.S.)	11-510-50
Fisherbrand™ Mini Stirrer, Caffeine Design					11-510-51
Fisherbrand™ Mini Stirrer, Alchemy Design					11-510-52
Fisherbrand™ Mini Stirrer, DNA Design					11-510-53
Fisherbrand™ Mini Stirrer, Periodic Table Design					11-510-54
Fisherbrand™ Mini Stirrer, Crystals Design					11-510-55
Fisherbrand™ Magnetic Stirrer with Water-/Air-Driven Turbines (Non-Electric)	Plastic	Dia.: 5 in. (12.7 cm)	800 rpm	N/A	14-511-210

*Includes stir bar

Hotplates

Description	Surface Material	Surface Dimensions	Temperature Range	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Isotemp™ Hot Plate	Ceramic	4.25 x 4.25 in. (10.8 x 10.8 cm)	Ambient to 540°C	120 V (U.S.)	HP88854200
				230 V (EU)	HP88854205
Fisherbrand™ Isotemp™ Hot Plate	Ceramic	7.25 x 7.25 in. (18.4 x 18.4 cm)	Ambient to 540°C	120 V (U.S.)	HP88857200
Fisherbrand™ Isotemp™ Hot Plate, with PT100 SS Temperature Probe	Ceramic	7.25 x 7.25 in. (18.4 x 18.4 cm)	Ambient to 450°C	120 V (U.S.)	HP88857290
Fisherbrand™ Isotemp™ Hot Plate	Ceramic	10.25 x 10.25 in. (26 x 26 cm)	Ambient to 400°C	120 V (U.S.)	HP88850200
				230 V (EU)	HP88850205

Stirring Hotplates

Description	Surface Material	Surface Dimensions	Speed	Temperature Range	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Isotemp™ Hot Plate Stirrer*	Ceramic	4.25 x 4.25 in. (10.8 x 10.8 cm)	50 to 1,500 rpm	Ambient to 540°C	120 V (U.S.)	SP88854200
					230 V (EU)	SP88854205
Fisherbrand™ Isotemp™ Hot Plate Stirrer*	Ceramic	7.25 x 7.25 in. (18.4 x 18.4 cm)	50 to 1,500 rpm	Ambient to 540°C	120 V (U.S.)	SP88857200
					230 V (EU)	SP88857205
Fisherbrand™ Isotemp™ Hot Plate Stirrer*	Aluminum	7.25 x 7.25 in. (18.4 x 18.4 cm)	50 to 1,500 rpm	Ambient to 300°C	120 V (U.S.)	SP88857204
					230 V (EU)	SP88857208
Fisherbrand™ Isotemp™ Hot Plate Stirrer*	Ceramic	10.25 x 10.25 in. (26 x 26 cm)	50 to 1,500 rpm	Ambient to 400°C	120 V (U.S.)	SP88850200
					230 V (EU)	SP88850205
Fisherbrand™ Isotemp™ Advanced Hot Plate Stirrer**	Ceramic	7.25 x 7.25 in. (18.4 x 18.4 cm)	50 to 1,500 rpm	Ambient to 450°C	120 V (U.S.)	SP88857290
	Aluminum			Ambient to 300°C	120 V (U.S.)	SP88857294
	Ceramic			Ambient to 450°C	230 V (EU)	SP88857295

*Includes stir bar

**Includes stainless-steel PT100 temperature probe, stir bar, supporting rod, and clamp kit

Your Environment. Our Chairs.

Design the Fisherbrand™ chair that fits your needs with our easy-to-use tool.

Visit fisherchair.com to get started.



Shakers, Mixers, and Rotators



Vortex Mixers

Description	Speed	Orbit	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Analog Vortex Mixer	300 to 3,200 rpm	4.9 mm	120 V (U.S.)	02-215-414
			230 V (International)	02-215-415
Fisherbrand™ Digital Vortex Mixer	500 to 3,000 rpm	4.9 mm	120 V (U.S.)	02-215-418
			230 V (International)	02-215-419
Fisherbrand™ Touch Mini Vortex Mixer	2,800 rpm	4.5 mm	120 V (U.S.)	14-955-151
			230 V (International)	14-955-152
Fisherbrand™ Analog Multi-Tube Vortex Mixer	1,200 to 2,400 rpm	3.6 mm	120 V (U.S.)	02-215-450
Fisherbrand™ Digital Multi-Tube Vortex Mixer	1,200 to 2,500 rpm	3.6 mm	120 V (U.S.)	02-215-452
Fisherbrand™ Variable Speed Mini Vortex Mixer	500 to 2,800 rpm	4.5 mm	115 V (?)	14-955-163
Fisherbrand™ Fixed Speed Vortex Mixer	3,200 rpm	4.9 mm	120 V (U.S.)	02-215-410
			230 V (International)	02-215-411
Fisherbrand™ Microplate Standard Vortex Mixer	300 to 2,500 rpm	3.5 mm	120 V (U.S.)	02-216-100
Fisherbrand™ Microplate Advanced Vortex Mixer	300 to 2,500 rpm	3.9 mm	120 V (U.S.)	02-216-101
Fisherbrand™ Heavy-Duty Standard Vortex Mixer	300 to 2,500 rpm	4.9 mm	120 V (U.S.)	02-216-108
Fisherbrand™ Heavy-Duty Digital Vortex Mixer			120 V (U.S.)	02-216-109
Fisherbrand™ Pulsing Vortex Mixer	500 to 3,000 rpm	2.5 mm	120 V (U.S.)	02-215-422
Fisherbrand™ Analog Vortex Mixer with Single Tube Holder	300 to 3,200 rpm	4.9 mm	120 V (U.S.)	02-215-430

Rocking Benchtop Shakers

Description	Surface Dimensions	Speed	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Multi-Platform Shaker, Orbit: 10 mm (0.4 in.)	31 x 28 cm (12 x 11 in.)	50 to 450 rpm	100–240 V (U.S.)	88-861-021
			100–240 V (International)	88-861-022
Fisherbrand™ Microplate Shaker with 4-Place Platform, Orbit: 2.5 mm (0.1 in)	32 x 26 cm (12.6 x 10.2 in.)	150 to 1,000 rpm	100–240 V (U.S.)	88-861-023
			100–240 V (International)	88-861-024
Fisherbrand™ Open-Air Rocking Shaker, Angle: 0 to 15°	25.4 x 32.4 cm (10 x 12.75 in.)	1 to 50 rpm	120 V (U.S.)	02-217-765
Fisherbrand™ Open Air Rocker, Angle: 1 to 15°	30.6 x 26.6 cm (12 x 10.5 in.)	1 to 50 rpm	100–240 V (U.S.)	88-861-025
			100–240 V (International)	88-861-026

Description	Surface Dimensions	Speed	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Nutating Mixer, Variable Speed, Angle: 20°	27 x 30.5 cm (10.5 x 12 in.)	2 to 60 rpm	100–240V (U.S.)	88-861-043
			100–240V (International)	88-861-044
Fisherbrand™ Nutating Mixer, Fixed Speed, Angle: 20°	30.6 x 26.6 cm (12 x 10.5 in.)	20 rpm	110V (U.S.)	88-861-041
		18 rpm	220V (International)	88-861-042
Fisherbrand™ Wave Motion Shaker, Angle: 0 to 12°	31 x 27 cm (12 x 10.5 in.)	5 to 120 rpm	100–240V (U.S.)	88-861-027
			100–240V (International)	88-861-028

Incubated Platform Shakers

Description	Surface Dimensions	Speed	Temperature Range	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Incubating Rocker, Angle: 0 to 15°	10 x 7.5 in. (25.4 x 19 cm)	1 to 50 rpm	Ambient + 5° to 65°C	120 V (U.S.)	02-217-761
Fisherbrand™ Incubating Mini-Shaker, Triple-Eccentric Drive	11 x 7.75 in. (27.9 x 19.7 cm)	100 to 1,200 rpm	Ambient + 5° to 65°C	120 V (U.S.)	02-217-753
Fisherbrand™ Incubating Microplate Shaker, Triple-Eccentric Drive, Orbit: 0.12 in. (3 mm), Clear Lid	6.7 x 10 in. (17 x 25.5 cm)	100 to 1,200 rpm	Ambient +5° to 65°C	120 V (U.S.)	02-217-757
				230V (International)	02-217-758
Fisherbrand™ Incubating Microplate Shaker, Triple-Eccentric Drive, Orbit: 0.12 in. (3 mm), Opaque Lid	6.7 x 10 in. (17 x 25.5 cm)	100 to 1,200 rpm	Ambient +5° to 65°C	120 V (U.S.)	02-217-759
				230V (International)	02-217-760

Cooling and Heating Shakers

Description	NIST Traceable	Speed	Temperature Range	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Isotemp™ Cooling Shake Touch Shaker	No	300 to 3,000 rpm	Ambient – 17°C to 100°C	120 V (U.S.)	02-217-737
	Yes				02-217-739
Fisherbrand™ Isotemp™ Shake Touch Shaker	No		Ambient + 4°C to 100°C	120 V (U.S.)	02-217-741
	Yes				02-217-743

Rotators

Description	Angle	Capacity	Speed	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Mini Tube Rotator	0° to 90°	Variable	10 to 40 rpm	100–240 V (U.S.)	88-861-051
				100–240 V (International)	88-861-052
Fisherbrand™ Multi-Purpose Tube Rotator	95° to 180°	15 x 50 mL	5 to 80 rpm	100–240 V (U.S.)	88-861-049
				100–240 V (International)	88-861-050
Fisherbrand™ Multi-Function 3D Rotator, Rotates and Vibrates	Reciprocal: 0° to 360°	Variable	5 to 100 rpm	100–240 V (U.S.)	88-861-047
Fisherbrand™ Tissue Culture Rotator, Drum (Required) Sold Separately (Cat. No. 14-251-251)	5° Above Horizontal to 90°	142 x 17 mm tubes	5 to 70 rpm	120 V (U.S.)	14-251-250*

*Carousel required and sold separately

Rotating Benchtop Shakers

Description	Capacity	Speed	Voltage (Plug Style)	Cat. No.
Fisherbrand™ 3D Platform Rotator	Variable	2 to 80 rpm	120 V (U.S.)	88-861-045
			120–240 V (International)	88-861-046
Fisherbrand™ Digital Bottle Rollers	Variable	1 to 80 rpm	100–240 V (U.S.)	11-676-250

Wrist Action Shakers

Description	Angle	Capacity	Speed	Cat. No.
Fisherbrand™ Flask Shaker	0° to 15°	8 x 250 mL	Variable: 0 to 450 OSC/min.	14-400-602
			Fixed: 385 OSC/min.	14-400-600

Overhead Stirrers (Single Shaft)

Description	Viscosity Rating	Capacity	Speed	Torque	Voltage (Plug Style)	Cat. No.
Fisherbrand™ CompactDigital™ Overhead Stirrer	15,000	Up to 25 L (6.6 gal.)	40 to 2,002 rpm	6 in.-lb.	120 V (U.S.)	14-500-211
Fisherbrand™ RealTorqueDigital™ Overhead Stirrer	50,000	Up to 60 L (16 gal.)	20 to 3000 rpm	30 in.-lb.	120 V (U.S.)	14-500-210
Fisherbrand™ Compact Digital Overhead Stirrer	15,000	25 L (6.5 gal.)	0 to 2,002 rpm	6.2 in.-lb.	220 V (International)	14-501-084
Fisherbrand™ RealTorqueDigital™ Overhead Stirrer, 220 V	50,000	Up to 60 L (16 gal.)	20 to 3000 rpm	30 in.-lb.	220 V (International)	14-501-085
Fisherbrand™ Electric Analog Laboratory Overhead Stirrers, Model A15	7,500	15 L	6,000 rpm	190 in.-lb.	120 V (U.S.)	14-500-215
Fisherbrand™ Electric Analog Laboratory Overhead Stirrer, Model A20	10,000	20 L	2,000 rpm	27 in.-lb.	120 V (U.S.)	14-500-214
Fisherbrand™ Electric Analog Laboratory Overhead Stirrer, Model A30	15,000	30 L	1,200 rpm	74 in.-lb.	120 V (U.S.)	14-500-213
Fisherbrand™ Electric Analog Laboratory Overhead Stirrer, Model A40	20,000	40 L	350 rpm	193 in.-lb.	120 V (U.S.)	14-500-212
Fisherbrand™ Air-Powered Analog Overhead Stirrer, Model AP10	5,000	10 L	10,000 rpm	45 in.-lb.	N/A (Air Powered)	14-500-219

Every Good Piece of Equipment Needs a Consumable

Like a centrifuge and its tubes, or a pipette and its tips, or a microscope and its slides, no piece of equipment can live up to its full potential without reliable consumables.

Visit fishersci.com/fisherbrand or fishersci.ca/fisherbrand to make your match.



Homogenizers



Bead Mill Homogenizers

Description	Capacity	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Bead Mill 4 Homogenizer	4 x 0.5 mL, 4 x 1.5 mL, 4 x 2 mL, or 1 x 7 mL Samples	120 V (U.S.)	15-340-164
Fisherbrand™ Bead Mill 24 Homogenizer	24 x 0.5/2 mL Tubes	120 V (U.S.)	15-340-163

Mechanical Homogenizers

Description	Sample Size	Speed	Max. Power	Dimensions (H x Dia.)	Voltage (Plug Style)	Cat. No.
Fisherbrand™ 150 Handheld Homogenizer	200 µL to 100 mL	5,000 to 35,000 rpm	150 W	22.8 x 6.35 cm (9 x 2.5 in.)	115 V (U.S.)	15-340-167
Fisherbrand™ 150 Homogenizer Package, Includes Motor, Stand Assembly, and 3 Stainless Steel Generator Probes (5 x 75, 7 x 115, and 10 x 115 mm)						15-340-168
Fisherbrand™ 850 Handheld Homogenizer	0.2 mL to 5 L	5,000 to 25,000 rpm	850 W	21.5 x 6.9 cm (8.5 x 2.75 in.)	115 V (U.S.)	15-340-169
Fisherbrand™ 850 Homogenizer Package, Includes Motor, Stand Assembly, and 3 Stainless Steel Generator Probes (10 x 115, 20 x 195, and 30 x 195 mm)						15-340-170

Ultrasonic Homogenizers

Description	Sample Size	Power	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Sonic Dismembrator, Model FB50, Includes 1/8 in. Probe	0.2 to 50 mL	50 W	110 V (U.S.)	FB-501-10
			220 V (International)	FB-502-20
Fisherbrand™ Sonic Dismembrator, Model FB50	0.2 to 50 mL	50 W	110 V (U.S.)	FB-50A-110
Fisherbrand™ Sonic Dismembrator, Model FB120, Includes 1/8 in. Probe	0.2 to 50 mL	120 W	110 V (U.S.)	FB-120-110
			220 V (International)	FB-120-220
Fisherbrand™ Sonic Dismembrator, Model FB120	0.2 to 50 mL	120 W	110 V (U.S.)	FB-120-A110
			220 V (International)	FB-120-A220
Fisherbrand™ Sonic Dismembrator, Model FB505, Includes 0.5 in. Probe	0.5 to 500 mL	500 W	110 V (U.S.)	FB-505-110
			220 V (International)	FB-505-220
Fisherbrand™ Sonic Dismembrator, Model FB505	0.5 to 500 mL	500 W	110 V (U.S.)	FB-505-A110
Fisherbrand™ Sonic Dismembrator, Model FB705, Includes 0.5 in. Probe	0.2 to 1,000 mL	700 W	110 V (U.S.)	FB-705-110
			220 V (International)	FB-705-220
Fisherbrand™ Sonic Dismembrator, Model FB705	0.2 to 1,000 mL	700 W	110 V (U.S.)	FB-705-A110

Water Baths and Incubators



Water Baths

Description	Temperature Range	Capacity	Voltage	Cat. No.
Fisherbrand™ Isotemp™ General Purpose Deluxe Water Bath	Ambient to 100°C	2 L (0.5 gal.), Shallow	120–230 V	FSGPD2S
		2 L (0.5 gal.)		FSGPD02
		5 L (1.3 gal.)		FSGPD05
		10 L (2.6 gal.)		FSGPD10
		5 / 10 L (1.3/2.6 gal.)		FSGPD15D
		20 L (5.3 gal.)		FSGPD20
Fisherbrand™ Isotemp™ Shaking Water Baths	Ambient + 5° to 100°C	15 L (7 gal.)	120–230 V	FSSWB15
		27 L (7 gal.)		FSSWB27

Refrigerated Incubators

Description	Temperature Range	Capacity	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Mini Refrigerated Incubator	17° to 50°C	18 L	120–240 V (U.S.)	15-015-2632

Dry Bath Incubators

Description	Temperature Range	Capacity	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Isotemp™ Digital Dry Bath/ Block Heater, 120 V	Ambient + 5° to 130°C	1 Block	120 V (U.S.)	88-860-021
		2 Blocks	120 V (U.S.)	88-860-022
		4 Blocks	120 V (U.S.)	88-860-023
Fisherbrand™ Isotemp™ Digital Dry Bath/ Block Heater, 220 V	Ambient + 5° to 130°C	1 Block	220 V (International)	88-860-024
		2 Blocks	220 V (International)	88-860-025
		4 Blocks	220 V (International)	88-860-026
Fisherbrand™ Heating Mini Dry Bath, 120 V	Ambient + 5° to 100°C	15 x 1.5 mL Tubes	115 V (U.S.)	14-955-218
	Ambient + 5° to 100°C	15 x 1.5 mL Tubes	115 V (U.S.)	14-955-219
Fisherbrand™ Mini Dry Bath	0°C to 100°C	15 x 1.5 mL Tubes	115 V (U.S.)	14-955-220
Fisherbrand™ Heating/Cooling Mini Dry Bath, 120 V	0° to 100°C	15 x 1.5 mL Tubes	115 V (U.S.)	14-955-221

Chillers and Circulators



Fisherbrand™ Isotemp™ Cooling/Heating Recirculating Chillers

Description	Pump Type	Temperature Range	Capacity	Voltage	Cat. No.
Fisherbrand™ Isotemp™ Model 250LCU	Force	-10° to 80°C	2.8 L (0.7 gal.)	115 V	13-874-643
Fisherbrand™ Isotemp™ Model 250LCSU	Force and Suction	-10° to 80°C	2.8 L (0.7 gal.)	115 V	13-874-644
Fisherbrand™ Isotemp™ Model 500LCU	Force	-10° to 80°C	2.8 L (0.7 gal.)	115 V	13-874-647
Fisherbrand™ Isotemp™ Model 500LCSU	Force and Suction	-10° to 80°C	2.8 L (0.7 gal.)	115 V	13-874-648
Fisherbrand™ Isotemp™ I Recirculating Chillers	PD1*	-10° to +30°C	9.5 L (2.5 gal.)	115 V	13-874-240
Fisherbrand™ Isotemp™ II Recirculating Chiller	PD1*	-10° to +30°C	9.5 L (2.5 gal.)	115 V	13-874-241
	PD2*	-10° to +30°C	9.5 L (2.5 gal.)	115 V	13-874-242
	MD30 Mag Drive Centrifugal Pump	-10° to +30°C	9.5 L (2.5 gal.)	115 V	13-874-243
Fisherbrand™ Isotemp™ III Recirculating Chiller, 220 V, 60 Hz	PD2*	-10° to +30°C	19 L (5 gal.)	230 V	13-874-245

*Positive Displacement Pump

Fisherbrand™ Isotemp™ Hydrocarbon Refrigerated/Heated Bath Circulators

Description	Pump Type	Pump Capacity	Temperature Range	Capacity	Voltage	Cat. No.
Fisherbrand™ Isotemp™ Model 4100 R35	Force	17 L/min. (310 mbar)	-45° to +200°C	6.8 to 8.6 L (1.8 to 2.3 gal.)	115 V	13-874-002
Fisherbrand™ Isotemp™ Model 5150 R35	Force	21 L/min. (750 mbar)	-45° to +200°C	6.8 to 8.6 L (1.8 to 2.3 gal.)	115 V	13-874-001
Fisherbrand™ Isotemp™ Model 6200 R35	Force and Suction	21 L/min. (750 mbar)	-45° to +200°C	6.8 to 8.6 L (1.8 to 2.3 gal.)	115 V	13-874-000

Fisherbrand™ Isotemp™ Refrigerated/Heated Bath Circulators

Description	Pump Type	Pump Capacity	Temperature Range	Capacity	Voltage	Cat. No.
Fisherbrand™ Isotemp™ Model 4100 R20	Force	17 L/min. (310 mbar)	-20° to +100°C	3 to 6 L (0.8 to 1.6 gal.)	115 V	13-874-180
Fisherbrand™ Isotemp™ Model 4100 R20, 230 V	Force	17 L/min. (310 mbar)	-20° to +100°C	3 to 6 L (0.8 to 1.6 gal.)	230 V	13-874-050
Fisherbrand™ Isotemp™ 4100 R20F	Force	17 L/min. (310 mbar)	-20°C to +100°C	5.4 to 6.5 L (1.4 to 1.7 gal.)	230 V	13-874-051
Fisherbrand™ Isotemp™ Model 4100 R20F	Force	17 L/min. (310 mbar)	-20° to +100°C	3 to 6 L (0.8 to 1.6 gal.)	115 V	13-874-181
Fisherbrand™ Isotemp™ Model 4100 R28	Force	17 L/min. (310 mbar)	-28° to +100°C	6.8 to 8.6 L (1.9 to 2.3 gal.)	115 V	13-874-182
Fisherbrand™ Isotemp™ Model 5150 R28	Force	17 L/min. (310 mbar)	-28° to +150°C	6.8 to 8.6 L (1.9 to 2.3 gal.)	115 V	13-874-126
Fisherbrand™ Isotemp™ Model 5150 R28, 230 V	Force	17 L/min. (310 mbar)	-28° to +100°C	6.8 to 8.6 L (1.9 to 2.3 gal.)	230 V	13-874-052
Fisherbrand™ Isotemp™ Model 6200 R20	Force	21 L/min. (805 mbar)	-20° to +100°C	3 to 6 L (0.8 to 1.6 gal.)	115 V	13-874-674
Fisherbrand™ Isotemp™ Model 6200 R20F	Force	21 L/min. (805 mbar)	-20° to +100°C	3 to 6 L (0.8 to 1.6 gal.)	115 V	13-874-675
Fisherbrand™ Isotemp™ Model 6200 R28	Force and Suction	21 L/min. (805 mbar)	-28° to +200°C	6.8 to 8.6 L (1.9 to 2.3 gal.)	115 V	13-874-676

Fisherbrand™ Isotemp™ Heated Bath Circulators

Description	Pump Type	Pump Capacity	Temperature Range	Capacity	Voltage	Cat. No.
Fisherbrand™ Isotemp™ Model 4100 H7	Force	17 L/min. (310 mbar)	10° to 100°C	4 to 7 L (1 to 1.8 gal.)	115 V	13-874-171
Fisherbrand™ Isotemp™ Model 4100 H11	Force	17 L/min. (310 mbar)	Ambient + 10° to 100°C	7 to 11 L (1.8 to 2.9 gal.)	115 V	13-874-172
Fisherbrand™ Isotemp™ Model 5150 H7	Force	17 L/min. (310 mbar)	10° to 150°C	4 to 7 L (1 to 1.8 gal.)	115 V	13-874-121
Fisherbrand™ Isotemp™ Model 6200 H7	Force and Suction	21 L/min. (750 mbar)	10° to 200°C	4 to 7 L (1 to 1.8 gal.)	115 V	13-874-671

Fisherbrand™ Isotemp™ Open Heated PPO Bath Circulators

Description	Pump Type	Pump Capacity	Temperature Range	Capacity	Voltage	Cat. No.
Fisherbrand™ Isotemp™ Model 4100 H19A	Force	17 L/min. (310 mbar)	Ambient + 10° to 100°C	3 to 5 L (0.7 to 1.3 gal.)	115 V	13-874-174
Fisherbrand™ Isotemp™ Model 4100 HSP, 230 V	Force	17 L/min. (310 mbar)	Ambient + 10° to 100°C	4.5 to 5.3 L (1.2 to 1.4 gal.)	230 V	13-874-044
Fisherbrand™ Isotemp™ Model 4100 H14P	Force	17 L/min. (310 mbar)	Ambient + 10° to 100°C	8 to 14 L (2.1 to 3.7 gal.)	115 V	13-874-175
Fisherbrand™ Isotemp™ Model 4100 H14P, 230 V	Force	17 L/min. (310 mbar)	Ambient + 10° to 100°C	11.3 to 14.1 L (3 to 3.7 gal.)	230 V	13-874-045
Fisherbrand™ Isotemp™ Model 4100 H21P	Force	17 L/min. (310 mbar)	Ambient + 10° to 100°C	13 to 21 L (3.4 to 5.5 gal.)	115 V	13-874-176
Fisherbrand™ Isotemp™ 4100 H21P	Force	17 L/min. (310 mbar)	Ambient +10° to 100°C	18 to 22.5 L (4.7 to 5.9 gal.)	230 V	13-874-046
Fisherbrand™ Isotemp™ Model 4100 H24	Force	17 L/min. (310 mbar)	Ambient + 10° to 100°C	14 to 24 L (3.7 to 6.3 gal.)	115 V	13-874-173
Fisherbrand™ Isotemp™ Model 5150 H11	Force	17 L/min. (310 mbar)	Ambient + 10° to 150°C	7 to 11 L (1.8 to 2.9 gal.)	115 V	13-874-124

Description	Pump Type	Pump Capacity	Temperature Range	Capacity	Voltage	Cat. No.
Fisherbrand™ Isotemp™ Model 6200 H11	Force and Suction	21 L/min. (805 mbar)	Ambient + 10° to 200°C	7 to 11 L (1.8 to 2.9 gal.)	115 V	13-874-672
Fisherbrand™ Isotemp™ Model 6200 H24	Force and Suction	21 L/min. (805 mbar)	Ambient + 10° to 200°C	14 to 24 L (3.7 to 6.3 gal.)	115 V	13-874-673

Fisherbrand™ Isotemp™ Immersion Circulators

Description	Pump Type	Pump Capacity	Temperature Range	Voltage	Cat. No.
Fisherbrand™ Isotemp™ Model 4100B, with Bridge	Force	17 L/min. (310 mbar)	Ambient + 10° to 100°C	115 V	13-874-438
Fisherbrand™ Isotemp™ Model 4100C, with Clamp	Force	17 L/min. (310 mbar)	Ambient + 10° to 100°C	230 V	13-874-431
Fisherbrand™ Isotemp™ Model 4100C, with Clamp	Force	17 L/min. (310 mbar)	Ambient + 10° to 100°C	115 V	13-874-432
Fisherbrand™ Isotemp™ Model 5150B, with Bridge	Force	17 L/min. (310 mbar)	Ambient + 10° to 150°C	115 V	13-874-440
Fisherbrand™ Isotemp™ Model 5150C, with Clamp	Force	17 L/min. (310 mbar)	Ambient + 10° to 150°C	115 V	13-874-434
Fisherbrand™ Isotemp™ Model 6200B, with Clamp	Force and Suction	21 L/min. (805 mbar)	Ambient + 10° to 200°C	230 V	13-874-441
Fisherbrand™ Isotemp™ Model 6200B, with Bridge	Force and Suction	21 L/min. (805 mbar)	Ambient + 10° to 200°C	115 V	13-874-442

Bring Your Lab to Life

Explore a comprehensive selection of lab furniture, including rugged steel furniture systems, complete lines of adaptable table systems, and custom wood, stainless-steel, and phenolic furnishings.

Visit fishersci.com/fisherbrandfurniture or fishersci.ca/fisherbrandfurniture to complete your lab space.



Ovens, Sterilizers, and Pumps



Laboratory Ovens

Description	Heating Method	Temperature Range	Capacity	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Isotemp™ 500 Series Economy Lab Oven	Convection	5° to 210°C	1.7 cu. ft.	120 V (U.S.)	13-246-516GAQ
Fisherbrand™ Isotemp™ General Purpose Heating and Drying Oven	Gravity Convection	50° to 250°C	60 L	120 V (U.S.)	15-103-0503
	Forced Air Convection		66 L		15-103-0510
Fisherbrand™ Gravity Oven	Gravity	50° to 250°C	65 L	120 V (U.S.)	15-103-0519

Vacuum Ovens

Description	Vacuum Range	Temperature Range	Capacity	Electrical Requirements (Output)	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Isotemp™ Vacuum Oven, Model 282A	0 to 30 in. Hg	Ambient to 280°C (536°F)	1.6 cu. ft.	120 V (1,800 W)	120 V (U.S.)	13-262-52
Fisherbrand™ Isotemp™ High-Temperature Vacuum Oven, Model 281A	0 to 30 in. Hg	Ambient to 280°C (536°F)	0.65 cu. ft. (18.4 L)	120 V (3,500 W)	120 V (U.S.)	13-262-50
				230 V (1,700 W)	240 V (International)	13-262-51

Vacuum Pumps

Description	Flow Rate	Maximum Vacuum	Electrical Requirements	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Maxima™ Rotary Vane Vacuum Pump, Model M2C	51 L/min. (1.8 cfm)	2 x 10 ⁻³ torr	115 V, 60 Hz	115 V (U.S.)	01-184-215
			230 V, 50 Hz	230 V (EU)	01-184-216
Fisherbrand™ Rotary Vane Vacuum Pump, Model M4C	79 L/min. (2.8 cfm)	1.5 x 10 ⁻³ torr	115 V, 60 Hz	115 V (U.S.)	01-184-202
Fisherbrand™ Maxima™ Rotary Vane Vacuum Pump, Model M6C	119 L/min. (4.2 cfm)	1.5 x 10 ⁻³ torr	115 V, 60 Hz	115 V (U.S.)	01-184-203
Fisherbrand™ Maxima™ Rotary Vane Vacuum Pump, Model M8C	158.5 L/min. (5.6 cfm)	1.5 x 10 ⁻³ torr	115 V, 60 Hz	115 V (U.S.)	01-184-204
			230 V, 50 Hz	230 V (EU)	01-184-209
Fisherbrand™ Maxima™ Rotary Vane Vacuum Pump, Model M16C	362.5 L/min. (12.8 cfm)	2 x 10 ⁻³ torr	115 V, 60 Hz	115 V (U.S.)	01-184-205
			230 V, 50 Hz	230 V (EU)	01-184-210

Description	Flow Rate	Maximum Vacuum	Electrical Requirements	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Maxima™ Rotary Vane Vacuum Pump, Model M24C	518 L/min. (18.3 cfm)	2 x 10 ⁻³ torr	115 V, 60 Hz	115 V (U.S.)	01-184-206
Fisherbrand™ Maxima™ Rotary Vane Vacuum Pump, Model M30C	626 L/min. (22.1 cfm)	2 x 10 ⁻³ torr	115 V, 60 Hz	115 V (U.S.)	01-184-207
			230 V, 50 Hz	230 V (International)	01-184-212
Fisherbrand™ Explosion-Proof Maxima™ Rotary Vane Vacuum Pump, Model M4C	79 L/min. (2.8 cfm)	1.5 x 10 ⁻³ torr	115 V, 60 Hz	115 V (U.S.)	01-184-208
Fisherbrand™ Explosion-Proof Maxima™ Rotary Vane Vacuum Pump, Model M8C	158.5 L/min. (5.6 cfm)	1.5 x 10 ⁻³ torr	115 V, 60 Hz	115 V (U.S.)	01-184-213
Fisherbrand™ Explosion-Proof Maxima™ Rotary Vane Vacuum Pump, Model M16C	362.5 L/min. (12.8 cfm)	2 x 10 ⁻³ torr	115 V, 60 Hz	115 V (U.S.)	01-184-214
Fisherbrand™ MaximaDry™ Oil-Free Vacuum Pump, One Stage	20 L/min. (0.7 cfm)	75 torr	115 V, 60 Hz	115 V (U.S.)	13-880-14
Fisherbrand™ MaximaDry™ Oil-Free Vacuum Pump, Two Stage	20 L/min. (0.7 cfm)	6 torr	115 V, 60 Hz	115 V (U.S.)	13-880-18
	35 L/min. (1.2 cfm)	6 torr			13-880-20
		1.5 torr			13-880-22
Fisherbrand™ MaximaDry™ Oil-Free Vacuum Pump, Parallel Stage	40 L/min. (1.4 cfm)	65 torr	115 V, 60 Hz	115 V (U.S.)	13-880-16

Syringe Pumps

Description	Capacity	Flow Rate	Linear Force	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Single Syringe Pump	10 µL to 60 mL	519 mL/hr.	9 kg (20 lb.)	110 V (U.S.)	14-831-200

Sterilizers and Autoclaves


Description	Capacity	Internal Dimensions (Dia. x D)	Voltage (Plug Style)	Cat. No.
STE Fisherbrand™ SterilElite™ Benchtop Autoclave, Front Loading	16 L (17 qt.)	23 x 40.6 cm (9 x 16 in.)	115 V	STE1622004
			220 V	STE1622008
	24 L (25.4 qt.)	26 x 45 cm (10.2 x 26 in.)	115 V	STE2422005
			220 V	STE2422006
	40 L (43 qt.)	30 x 57 cm (11 x 22 in.)	220 V	STE4022009
	Fisherbrand™ Microbead Small Sterilizer	300 g (11 oz.)	4 x 12.7 cm (1.6 x 5 in.)	115 V (U.S.)
230 V (International)				14-955-341
Fisherbrand™ Microbead Tall Sterilizer	500 g (18 oz.)	4 x 21.5 cm (1.6 x 7.5 in.)	115 V (U.S.)	14-955-342
			230 V (International)	14-955-343

Other Sterilizing Devices

Description	Maximum Temperature	Dimensions (H x W x D)	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Bacti-Loop™ Micro-Sterilizer	500°C (1,500°F)	16.5 x 10 x 15 cm (6.5 x 4 x 6 in.)	120 V (U.S.)	22-630-001

Electrophoresis Equipment

Horizontal Gel Systems



Description	Type	Gel Dimensions	Buffer Volume	Cat. No.
Fisherbrand™ Horizontal Minigel Electrophoresis System	Standard	10.5 x 6 cm or 5 x 6 cm	300 mL	14-955-170
Fisherbrand™ Horizontal Minigel Electrophoresis System	Standard	7 x 10 cm	400 mL	FB-SB-710
Fisherbrand™ Horizontal Midigel Electrophoresis System	Standard	13 x 16 cm	800 mL	FB-SB-1316
Fisherbrand™ Horizontal Large Gel Electrophoresis System	Standard	20 x 25 cm	2.3 L	FB-SB-2025
Fisherbrand™ Horizontal Midigel Electrophoresis System	Recirculating	13 x 16 cm	1.2 L	FB-SBR-1316
Fisherbrand™ Horizontal Large Gel Electrophoresis System	Recirculating	20 x 25 cm	2 L	FB-SBR-2025

Vertical Gel Systems

Description	Gel Dimensions	Buffer Volume	Cat. No.
Fisherbrand™ Vertical Electrophoresis System	10 x 10 cm	300 mL	FB-VE10-1
	16 x 14 cm	550 mL	FB-VE16-1




Electrophoresis Power Supplies

Description	Applications	Maximum Current	Maximum Voltage	Maximum Power	Jacks	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Compact Electrophoresis Power Supply	DS-PAGE, DGGE/CDGE, DNA/RNA Submarine Electrophoresis	400 mA	300 V	75 W	3	120 V (U.S.)	FB300Q
Fisherbrand™ High-Current Electrophoresis Power Supply	High-Current Electroblotting (Western Tank and Semidry, Southern and Northern), SDS-PAGE Electrophoresis	2 A	200 V	200 W	4	120 V (U.S.)	FB200Q
Fisherbrand™ Programmable Electrophoresis Power Supply	Isoelectric Focusing, SDS-PAGE, Native SDS-PAGE, DNA Sequencing, High-Voltage Electrophoresis	400 mA	3,000 V	400 W	4	120 V (U.S.)	FB3000Q

View Separations in Real Time

Fisherbrand™ Real-Time Electrophoresis Systems let you run DNA gels, view separations as they occur, and capture gel images using your smartphone.

- For small DNA gel runs
- Available with a 35, 50, or 100 V power supply
- Compatible with Applied Biosystems™ SYBR™, GelGreen, SmartGlow, and other green fluorescent DNA stains

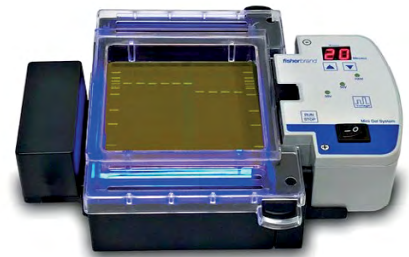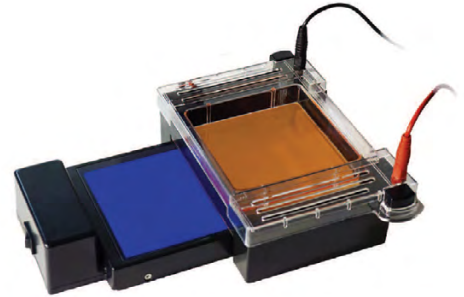

Real-Time Electrophoresis Systems

Description	Gel Dimensions	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Real-Time Electrophoresis Tank System, Requires External Power Supply	10.5 x 10 cm, 10.5 x 6 cm	115 V (U.S.)	14-955-205
		230 V (International)	14-955-206
Fisherbrand™ Real-Time Electrophoresis Tank System with Integral Power Supply (35, 50, or 100 V)	10.5 x 10 cm, 10.5 x 6 cm	115 V (U.S.)	14-955-207
		230 V (International)	14-955-208

Centrifuges, Microplate Washers, and Readers



Centrifuges

Description	Speed	Capacity	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Mini Plate Spinner Centrifuge	2,500 rpm	2 Microplates	120 V (U.S.)	14-100-143
Fisherbrand™ Mini Plate Spinner Centrifuge			230 V (International)	14-100-141
Fisherbrand™ Microplate Centrifuge	2,500 rpm (850 x g)	2 PCR Microplates	115 V (U.S.)	14-955-300
Fisherbrand™ Mini-Centrifuge with Two Rotors	6,000 rpm (2,000 x g)	16 x 0.2 mL or 6 x 1.5/2 mL Tubes	100–240 V (U.S. and International)	12-006-901
Fisherbrand™ High-Speed Mini Centrifuge	12,500 rpm	12 x 1.5/2.0 mL Tubes	100–240 V (U.S. and International)	12-006-900
Fisherbrand™ accuSpin™ Micro 17 Microcentrifuge, Ventilated	3,300 rpm (17,000 x g)	24 x 1.5/2 mL Tubes	120 V (U.S.)	13-100-675
Fisherbrand™ accuSpin™ Micro 17R Microcentrifuge, Refrigerated				13-100-676
Fisherbrand™ Combination Centrifuge/Stirrer	Stirrer: 2,500 rpm; Centrifuge: 12,500 rpm	Stirrer: 3 L; Centrifuge: 12 x 1.5/2.0 mL Tubes or 6 x 5 mL Tubes	100–240 V (U.S. and International)	14-127-570

Microplate Washers

Description	Cell Washing	Plate Type	Waste Capacity	Voltage	Cat. No.
Fisherbrand™ accuWash™ Microplate Washer	No	96-Well	1 Bottle	100–240 V	14-377-577
Fisherbrand™ accuWash™ Versa™ Microplate Washer	Yes	96-Well, 384-Well	3 Bottles	100–240 V	14-377-578

Microplate Readers

Description	With Incubator	Plate Type	Wavelength Range	Voltage	Cat. No.
Fisherbrand™ accuSkan™ FC Filter-Based Microplate Photometer	No	96-Well	340 to 850 nm	100–240 V	14-377-575
	Yes	96-Well, 384-Well			14-377-576

Microscopes



Simple Microscopes

Description	Head Style	Nosepiece Positions	Condenser	Objectives	Cat. No.
Fisherbrand™ Entry Level Upright Microscope	Monocular	4	Fixed Abbe NA 1.25 with Filter Holder	Achromatic 4X, 10X, 40X, 100X (Oil)	03-000-000
	Binocular				03-000-001
	Monocular	4	Fixed Abbe NA 1.25 with Filter Holder	Semi-Plan 4X, 10X, 40X, 100X (Oil)	03-000-002
	Binocular				03-000-003
	Monocular	4	Fixed Abbe NA 1.25 with Filter Holder	Plan Achromatic 4X, 10X, 40X, 100X (Oil)	03-000-004
	Binocular				03-000-005

Compound Upright Microscopes

Description	Head Style	Nosepiece Positions	Condenser	Objectives	Camera	Cat. No.
Fisherbrand™ Entry Level Upright Microscope	Binocular	4	Fixed Abbe NA 1.25 with Filter Holder	Achromatic 4X, 10X, 40X, 100X (Oil)	N/A	11-350-101
Fisherbrand™ Entry Level Research Grade Inverted Microscope with Simple Cross Polarization	Trinocular	5	Abbe NA 0.30, with Phase Slider, Removable	PL BF 4X; PH 10X, 20X	Portal Available	03-000-013
Fisherbrand™ Research Grade Upright Microscope	Binocular	5	Abbe NA 1.25, with Filter Holder	Plan Achromatic 4X, 10X, 40X, 100X (Oil)	N/A	03-000-007
	Trinocular	5			Portal Available	03-000-008
Fisherbrand™ Research Grade Upright Microscope with Color Camera	Trinocular	4	Abbe NA 1.25, with Filter Holder	Plan Achromatic 4X, 10X, 40X, 100X (Oil)	3MP USB	03-000-024
		5				03-000-026
	Binocular	5	Abbe NA 1.25, with Filter Holder	Plan Achromatic 4X, 10X, 40X, 100X (Oil)	1080P HDMI	03-000-032
		Trinocular				4
	Binocular	4	Abbe NA 1.25, with Filter Holder	Plan Achromatic 4X, 10X, 40X, 100X (Oil)	5MP USB	03-000-029
		Trinocular				4
03-000-030						

Description	Head Style	Nosepiece Positions	Condenser	Objectives	Camera	Cat. No.
Fisherbrand™ Phase Contrast Research Grade Upright Microscope with Color Camera	Trinocular	4	Abbe Phase NA 1.25 with Filter Holder	PL PH 10X, 20X; Plan Achromatic 40X, 100X	3MP USB	03-000-027
	Binocular				1080P HDMI	03-000-031
	Binocular				10MP USB	03-000-034
Fisherbrand™ Phase Contrast Research Grade Upright Microscope with Optional Camera	Trinocular	5	Abbe Phase NA 1.25 with Filter Holder	Plan Achromatic Phase 10X, 20X, 40X, 100X (Oil)	Optional 0.5x C-Mount	03-000-010
Fisherbrand™ Advanced Research Grade Upright Microscope	Trinocular	5	Abbe NA 1.25, with Filter Holder	High-Contrast Chromatic-Free Plan Achromatic 4X, 10X, 40X, 50X (Oil), 100X (Oil)	No Camera Attachment	03-000-103
	Trinocular				Camera Attachment	03-000-104
Fisherbrand™ Advanced Research Grade Upright Phase Contrast Microscope	Trinocular	5	Abbe NA 1.25, with Filter Holder	Plan Achromatic Phase 10X, 20X, 40X, 100X (Oil)	Camera Attachment	03-000-106
Fisherbrand™ Advanced Research Grade Upright Microscope with Simple Cross Polarization	Binocular	5	Abbe NA 1.25, with Filter Holder	High-Contrast Chromatic-Free Plan Achromatic 4X, 10X, 40X, 100X (Oil)	No Camera Attachment	03-000-107
	Trinocular				Camera Attachment	03-000-108
Fisherbrand™ Advanced Research Grade Upright Microscope	Binocular	5	Abbe NA 1.25, with Filter Holder	High-Contrast Chromatic-Free 4X, 10X, 40X, 100X (Oil)	No Camera Attachment	03-000-011
	Trinocular				Camera Attachment	03-000-012

Stereo Microscopes

Description	Illumination	Head Style	Magnification	Eyepiece	Objectives	Cat. No.
Fisherbrand™ Basic Stereo Zoom Microscope	LED	Binocular	Continuous Zoom (1:4)	10X	1X to 4X	03-000-018
	LED	Trinocular with Camera Attachment	Continuous Zoom (1:4)	10X	1X to 4X	03-000-028
	None	Trinocular with Camera Attachment	Continuous Zoom (1:4)	10X	1X to 4X	03-000-021
Fisherbrand™ Research Grade Stereo Zoom Microscope	LED (Ring)	Binocular	Continuous Zoom (6.4:1)	10X	0.7X to 4.5X	03-000-014
		Trinocular				03-000-015
Fisherbrand™ Basic Fixed Magnification Stereo Microscope	LED (Ring)	Binocular	Dual, Fixed	10X	1X, 3X	03-000-037
					2X, 4X	03-000-038
Fisherbrand™ Basic Digital Stereo Zoom Microscope with 3MP USB Color Camera	LED (Ring)	Trinocular with 0.5X C-Mount Lens	Continuous Zoom (1:4)	10X	1X to 4X	03-000-039
Fisherbrand™ Advanced Fixed Magnification Stereo Microscope	LED (Ring)	Binocular	Dual, Fixed	15X	1X, 3X	03-000-016
					2X, 4X	03-000-017
				10X	1X, 3X	03-000-035
					2X, 4X	03-000-036

Cameras

Description	Interface	Cat. No.
Fisherbrand™ Digital Microscope Eyepiece Camera, Extends to C- or CS-Mounted Cameras	2.0 MP USB	03-000-040

Refractometers



Refractometers

Description	Scale: Range	Temperature Compensation	Dimensions (L x W x H)	Power	Cat. No.
Fisherbrand™ Handheld Analog Clinical Refractometer	Urine SG: 1.000 to 1.050; Serum Protein: 1 to 12 g/dL; Refractive Index: 1.334 to 1.360	No	17.2 x 4 x 4 cm	None (Ambient light)	12-561-340
		Yes			12-561-341
Fisherbrand™ Handheld Analog Salinity Refractometer	Salinity: 1.000 to 1.070 SG. (0 to 100 ppt)	Yes	20.4 x 4 x 4 cm	None (Ambient light)	12-561-335
Fisherbrand™ Handheld Analog Automotive Refractometer	Ethylene: -84° to 32°F; Propylene: -60° to 32°F; Battery Fluid: 1.100 to 1.400	Yes	15.3 x 4 x 4 cm	None (Ambient light)	12-561-336
Fisherbrand™ Handheld Analog Brix/Sucrose Refractometer	Brix: 0 to 10% Brix: 0 to 32%	Yes	20.4 x 4 x 4 cm	None (Ambient light)	12-561-337
		No			12-561-338
		Yes			12-561-339
Fisherbrand™ Handheld Digital Brix/RI Refractometer	Brix: 0 to 50%	Yes	2.5 x 6 x 12 cm	Battery (AAA)	12-561-343
	Brix: 0 to 90%				12-561-344
	Brix Fructose: 0 to 68.9%				12-561-346
	Brix: 0 to 60%				12-561-347
Fisherbrand™ Handheld Digital Honey Refractometer	Brix: 0% to 90%; Moisture: 5% to 38%; Baume: 33° to 48°C; Refractive Index (RI): 1.3330 to 1.5300nD	Yes	2.5 x 5.8 x 12.1 cm	Battery (AAA)	12-561-352
Fisherbrand™ Handheld Digital Wine Refractometer	Brix: 0% to 50.0%; PA (% v/v): 0% to 22%; Oechsle (Oe): 0° to 150°C; KMW (Babo): 0°C to 25°C	Yes	2.5 x 5.8 x 12.1 cm	Battery (AAA)	12-561-353
Fisherbrand™ Handheld Digital Clinical Refractometer	Urine SG: 1.000 to 1.050; Serum Protein: 0.1 to 12.0; Refractive Index (RI): 1.3330 to 1.4200nD	Yes	2.5 x 5.8 x 12.1 cm	Battery (AAA)	12-561-354
Fisherbrand™ Handheld Digital Refractometer for Salinity	Salinity: 0% to 28%; SG: 1.000 to 1.217; RI: 1.330 to 1.4200nD	Yes	2.5 x 5.8 x 12.1 cm	Battery (AAA)	12-561-350
	Seawater Salinity: 0.0% to 100%; Chlorinity: 0.0% to 57%; SG: 1.000 to 1.075; RI: 1.330 to 1.4200nD				12-561-351
Fisherbrand™ Analog Abbe Benchtop RI Refractometer	RI 1.3000 to 1.7000nD; Brix 0 to 95%	No	270 x 180 x 370 mm	None (Ambient light)	12-561-359

Heating Mantles



Multi-Recess Heating Mantles

Description	Capacity	Maximum Temperature	Power	Voltage (Plug Style)	Cat. No.
Fisherbrand™ 3-Recess Extraction Heating Mantle	100 mL	450°C (842°F)	110 W	120 V (U.S.)	10-067-210
	250 mL	450°C (842°F)	220 W	120 V (U.S.)	10-067-211
	500 mL	450°C (842°F)	330 W	120 V (U.S.)	10-667-212
	1,000 mL	450°C (842°F)	495 W	120 V (U.S.)	10-067-213
Fisherbrand™ 6-Recess Extraction Heating Mantle for Round-Bottom Flasks	6 x 100 mL	450°C (842°F)	110 W	120 V (U.S.)	10-067-214
	6 x 250 mL	450°C (842°F)	220 W	120 V (U.S.)	10-067-215
	6 x 500 mL	450°C (842°F)	330 W	120 V (U.S.)	10-067-216

Heating Mantles with Controls

Description	Capacity	Maximum Temperature	Power	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Metal-Housed Heating Mantle with Controls	50 mL	450°C (842°F)	60 W	120 V (U.S.)	10-067-200
	100 mL	450°C (842°F)	110 W	120 V (U.S.)	10-067-201
	250 mL	450°C (842°F)	165 W	120 V (U.S.)	10-067-202
	500 mL	450°C (842°F)	220 W	120 V (U.S.)	10-067-203
	1,000 mL	450°C (842°F)	325 W	120 V (U.S.)	10-067-204
	2,000 mL	450°C (842°F)	545 W	120 V (U.S.)	10-067-205
	3,000 mL	450°C (842°F)	650 W	120 V (U.S.)	10-067-206
	4,000 mL	450°C (842°F)	815 W	120 V (U.S.)	10-067-207
	5,000 mL	450°C (842°F)	935 W	120 V (U.S.)	10-067-208
	6,000 mL	450°C (842°F)	1,090 W	120 V (U.S.)	10-067-209
Fisherbrand™ Metal-Housed Magnetic Stirring Heating Mantle	100 mL	450°C (842°F)	110 W	120 V (U.S.)	11-476-341
	250 mL	450°C (842°F)	165 W	120 V (U.S.)	11-476-342
	500 mL	450°C (842°F)	220 W	120 V (U.S.)	11-476-343
	1,000 mL	450°C (842°F)	325 W	120 V (U.S.)	11-476-344

Heating Mantles without Controllers

Description	Capacity	Maximum Temperature	Power	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Lower Hemispherical Heating Mantle and ON/OFF Control (°C Controller)	50 mL	482°C (900°F)	60 W	120 V (U.S.)	11-476-000
	100 mL	482°C (900°F)	80 W	120 V (U.S.)	11-476-001
	125 mL	482°C (900°F)	80 W	120 V (U.S.)	11-476-002
	200 mL	482°C (900°F)	100 W	120 V (U.S.)	11-476-003
	250 mL	482°C (900°F)	180 W	120 V (U.S.)	11-476-004
	500 mL	482°C (900°F)	270 W	120 V (U.S.)	11-476-005
	1,000 mL	482°C (900°F)	380 W	120 V (U.S.)	11-476-006
	2,000 mL	482°C (900°F)	500 W	120 V (U.S.)	11-476-007
	3,000 mL	482°C (900°F)	500 W	120 V (U.S.)	11-476-008
	5,000 mL	482°C (900°F)	600 W	120 V (U.S.)	11-476-009
	12,000 mL	482°C (900°F)	1,300 W	120 V (U.S.)	11-476-010
Fisherbrand™ Lower Hemispherical Cloth Heating Mantle	50 mL	482°C (900°F)	60 W	240 V (None)	11-476-011
	100 mL	482°C (900°F)	80 W	240 V (None)	11-476-012
	125 mL	482°C (900°F)	80 W	240 V (None)	11-476-013
	200 mL	482°C (900°F)	100 W	240 V (None)	11-476-014
	250 mL	482°C (900°F)	180 W	240 V (None)	11-476-015
	500 mL	482°C (900°F)	270 W	240 V (None)	11-476-016
	1,000 mL	482°C (900°F)	380 W	240 V (None)	11-476-017
	2,000 mL	482°C (900°F)	500 W	240 V (None)	11-476-018
	3,000 mL	482°C (900°F)	500 W	240 V (None)	11-476-019
	5,000 mL	482°C (900°F)	600 W	240 V (None)	11-476-020
	12,000 mL	482°C (900°F)	1,300 W	240 V (None)	11-476-021
Fisherbrand™ Upper Hemispherical Cloth Heating Mantle	250 mL	482°C (900°F)	140 W	120 V (U.S.)	11-476-022
				240 V (None)	11-476-028
	500 mL	482°C (900°F)	140 W	120 V (U.S.)	11-476-023
				240 V (None)	11-476-029
	1,000 mL	482°C (900°F)	140 W	120 V (U.S.)	11-476-024
				240 V (None)	11-476-030
	2,000 mL	482°C (900°F)	200 W	120 V (U.S.)	11-476-025
			200 W	240 V (None)	11-476-031
	3,000 mL	482°C (900°F)	200 W	120 V (U.S.)	11-476-026
			200 W	240 V (None)	11-476-032
5,000 mL	482°C (900°F)	300 W	120 V (U.S.)	11-476-027	
		300 W	240 V (None)	11-476-033	

Description	Capacity	Maximum Temperature	Power	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Soft Sided Tabletop Heating Mantle	50 mL	482°C (900°F)	52 W	120 V (U.S.)	11-476-034
				240 V (U.S.)	11-476-042
	100 mL	482°C (900°F)	70 W	120 V (U.S.)	11-476-035
				240 V (U.S.)	11-476-043
	250 mL	482°C (900°F)	143 W	120 V (U.S.)	11-476-036
				240 V (U.S.)	11-476-044
	500 mL	482°C (900°F)	210 W	120 V (U.S.)	11-476-037
				240 V (U.S.)	11-476-045
	1,000 mL	482°C (900°F)	377 W	120 V (U.S.)	11-476-038
				240 V (U.S.)	11-476-046
	2,000 mL	482°C (900°F)	520 W	120 V (U.S.)	11-476-039
				240 V (U.S.)	11-476-047
	3,000 mL	482°C (900°F)	550 W	120 V (U.S.)	11-476-040
				240 V (U.S.)	11-476-048
5,000 mL	482°C (900°F)	620 W	120 V (U.S.)	11-476-041	
			240 V (U.S.)	11-476-049	

Heating Mantle Controllers

Description	Type	Sensor Type	Temperature Range Control	Voltage (Plug Style)	Cat. No.
Fisherbrand™ Digital ON/OFF Benchtop Temperature Controller	°C display	J-Type Thermocouple	0 to 600°C (32 to 999°F)	120 V (U.S.)	11-476-114
				240 V (U.S.)	11-476-118
	°F Display	K-Type Thermocouple	0 to 600°C (32 to 999°F)	120 V (U.S.)	11-476-115
	°C display				11-476-116

Go Beyond the Bench

The Fisherbrand™ collection is more than consumables and small equipment. We also offer a variety of refrigerators, freezers, incubators, fume hoods, and more to outfit your whole lab.

Visit fishersci.com/fisherbrand or fishersci.ca/fisherbrand to shop the whole collection.





The Fisherbrand™ collection features value-packed products that make your lab life easier, every day, when it matters most. **Guaranteed.**

We stand behind our products with a 100% satisfaction guarantee. So buy it, try it, and if within 30 days you don't love it as much as we do, we'll give you your money back.

Visit fishersci.com/fisherbrandguarantee to learn more.



Visit fishersci.com or fishersci.ca to find more Fisherbrand equipment.

Distributed by Fisher Scientific. Contact us today:

In the United States

Order online: fishersci.com

Call customer service: 1-800-766-7000

In Canada

Order online: fishersci.ca

Call customer service: 1-800-234-7437

